


# SINGLE CHANNEL NODE DATASHEET

## THE SYSTEM: SMART SHM

Move Solutions is a trusted leader in **Smart Structural Health Monitoring (Smart SHM)**. Our wireless system offers a remote, continuous and comprehensive analysis of the health of the structures. By integrating cutting-edge **Internet of Things (IoT)** technology with Structural Health Monitoring practices we promote more sustainable and resilient infrastructure.

### KEY PARAMETERS

- Easy installation on the structure
- Minimum maintenance required
- Long-range communication
- Fully remote management and customization
- Data analysis with advanced algorithms
- Modular system
- High precision
- Waterproof rating IP67
- Long-life battery
- Integrated temperature sensor

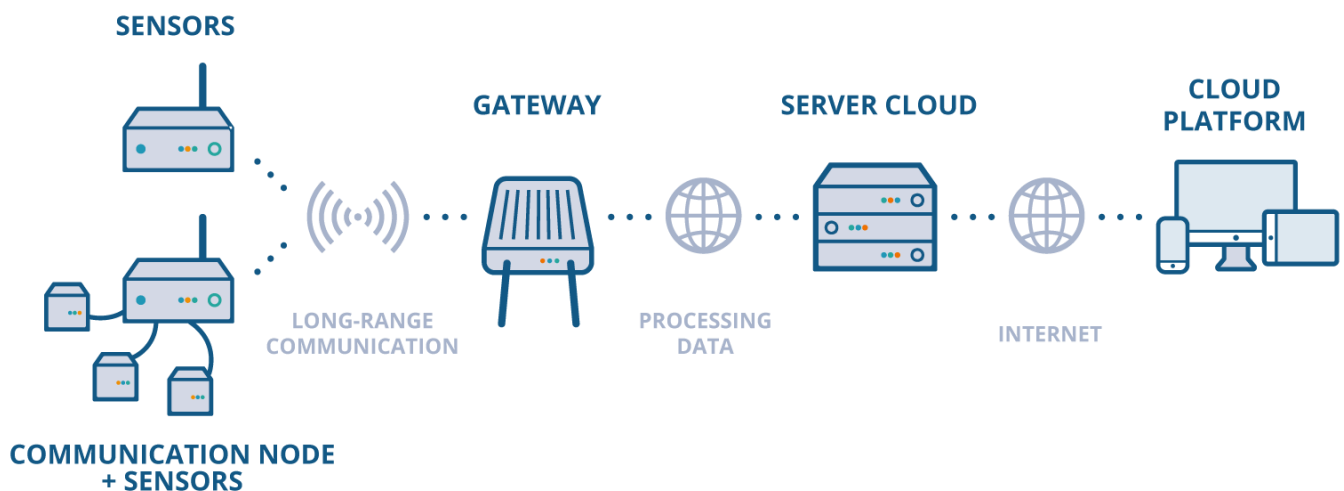

## HOW IT WORKS

Move Solutions offers a wireless monitoring system for *static, dynamic, geotechnical and environmental analysis* of all civil infrastructures: bridges, construction sites, rails, and more.

Small **battery-powered sensors** combined with an **IoT Platform** and highly **advanced algorithms** provide a comprehensive monitoring solution aimed at simplifying asset management. The data recorded by the sensors can be viewed on Move Solutions IoT Platform, which allows users to remotely monitor and manage structures in real time. They can set different operating parameters of each sensor, such as sampling rates, resolution and full scale, alarm and activation thresholds, and much more. That allows users to detect structural damage in time to implement preventive maintenance and reduce costs. Move Solutions system empowers infrastructure owners with insights to promote a proactive monitoring approach for safer, more sustainable, and resilient infrastructures.

## ADVANTAGES

- Reduction of manual and on-site measurements
- Reduced downtime and disruptions to regular operations
- Real-time, remote and continuous data visualization
- Short-term and long-term data analysis
- Easy addition of sensors to extend the monitored area
- Cost reduction thanks to easy installation and maintenance
- Risk reduction and high reliability
- Preventive maintenance

## THE DEVICE: SINGLE CHANNEL NODE



The Single Channel Node makes geotechnical probes for LoRaWAN wireless communication, and it sends an alarm when a certain activation threshold is exceeded. It is wireless, battery-powered, and plug-and-play.

### TECHNICAL SPECIFICATIONS

#### OPERATION

<b>Modes of acquisition</b>	Scheduled, Scheduled + Accelerometer Trigger
<b>Cadence for scheduled acquisition</b>	2 min, 10 min, 20 min, 30 min, 1 hour, 6 hours, 12 hours
<b>Supply</b>	2 Lithium batteries 3.6V (Suggested: EVE ER34615EHR2)
<b>Absolute synchronization</b>	± 1 sec
<b>Integrated accelerometer</b>	± 2 g, 1 mg resolution, 0.7 - 25 Hz bandwidth

#### RADIO

<b>Radio protocol</b>	LoRaWAN
<b>Supported LoRaWAN bands</b>	EU868, US915, AU915
<b>Link coverage*1</b>	1 km (line of sight with gateway)

#### GENERAL DATA

<b>Ingress protection*2</b>	IP67
<b>Size</b>	130x171.2x62 mm
<b>Material</b>	Polycarbonate
<b>Operating temperature</b>	-40°C / +85°C
<b>Weight</b>	500 g

### INSTALLATION

<b>Input cable section</b>	30 - 14 AWG terminal block, Ø 3 mm - Ø 8 mm PG9 cable gland
<b>Method</b>	Pole or wall mounting using special plates and screws
<b>Configuration</b>	<ul style="list-style-type: none"> <li>▪ Wall fixing</li> <li>▪ Ceiling fixing</li> <li>▪ Floor fixing</li> </ul>

### DECKSCN-MA0

<b>Interface</b>	4 - 20 mA (2 or 3 wires)
<b>Sensor supply</b>	12.3 VDC
<b>Minimum accuracy</b>	± 0.1% of reading
<b>Measuring span</b>	0 - 24 mA
<b>Auxiliary NTC channel</b>	Yes

### DECKSCN-MVV

<b>Interface</b>	mV/V
<b>Sensor supply</b>	5 VDC
<b>Minimum accuracy</b>	± 0.2% of reading or ± 0.002 mV/V
<b>Measuring span</b>	± 8 mV/V
<b>Auxiliary NTC channel</b>	Yes

### DECKSCN-V05

<b>Interface</b>	Voltage Output
<b>Sensor Supply</b>	5 VDC
<b>Minimum Accuracy</b>	± 0.2% of reading
<b>Measuring Span</b>	0 - 5 V
<b>Auxiliary NTC channel</b>	Yes

### DECKSCN-V12

<b>Interface</b>	Voltage Output
<b>Sensor Supply</b>	12.3 VDC

<b>Minimum Accuracy</b>	± 0.2% of reading
<b>Measuring Span</b>	0 - 12 V
<b>Auxiliary NTC channel</b>	Yes
<b>DECKSCN-POT</b>	
<b>Interface</b>	Potentiometer
<b>Sensor Supply</b>	2.7 VDC
<b>Minimum Accuracy</b>	± 0.02% of reading
<b>Measuring Span</b>	0 - 100 %
<b>Auxiliary NTC channel</b>	Yes
<b>DECKSCN-PT1</b>	
<b>Interface</b>	Pt100 - Pt1000 (4 wires)
<b>Minimum Accuracy</b>	± 0.03% of reading
<b>Measuring Span</b>	1500 Ω max
<b>Auxiliary NTC channel</b>	No
<b>DECKSCN-NTC</b>	
<b>Interface</b>	NTC
<b>Minimum Accuracy</b>	± 0.1% of reading
<b>Measuring Span</b>	1 MΩ max
<b>Auxiliary NTC channel</b>	No
<b>DECKSCN-VBW</b>	
<b>Interface</b>	Vibrating Wire
<b>Measuring Span</b>	400 - 10000 Hz
<b>Auxiliary NTC channel</b>	Yes

### BATTERY LIFE ESTIMATION (without accelerometer)\*<sup>3</sup>

Interface	Conditions	Read duration	Read cadence	Estimated battery life
<b>4-20 mA, 2 wires</b>	The probe is reading half of its full scale (12 mA).	5 seconds	10 minutes	3.2 years
<b>4-20 mA, 3 wires</b>	Probe supply current of 50 mA.	8 seconds	30 minutes	2.3 years
<b>mV/V</b>	Probe load resistance = 350 Ω.	5 seconds	10 minutes	3.4 years
<b>Voltage (5 V)</b>	Probe supply current of 50 mA.	8 seconds	20 minutes	2.5 years
<b>Voltage (12 V)</b>	Probe supply current of 50 mA.	8 seconds	30 minutes	2.1 years
<b>Vibrating Wire</b>	—	2 seconds	10 minutes	4.1 years
<b>Pt100-Pt1000</b>	—	5 seconds	10 minutes	5.2 years
<b>NTC</b>	—	5 seconds	10 minutes	5.2 years
<b>Potentiometer</b>	Resistance of potentiometer = 1kΩ	5 seconds	10 minutes	5.2 years

### BATTERY LIFE ESTIMATION (with accelerometer)\*<sup>3</sup>

Interface	Conditions	Read duration	Daily events	Estimated battery life
<b>4-20 mA, 2 wires</b>	The probe is reading half of its full scale (12 mA).	5 seconds	20 events/day	2.0 years
<b>4-20 mA, 3 wires</b>	Probe supply current of 50 mA.	8 seconds	20 events/day	2.5 years
<b>mV/V</b>	Probe load resistance = 350 Ω.	5 seconds	100 events/day	2.1 years
<b>Voltage (5 V)</b>	Probe supply current of 50 mA.	8 seconds	20 events/day	2.3 years
<b>Voltage (12 V)</b>	Probe supply current of 50 mA.	8 seconds	20 events/day	2.0 years
<b>Vibrating Wire</b>	—	2 seconds	100 events/day	2.2 years
<b>Pt100-Pt1000</b>	—	5 seconds	100 events/day	2.5 years
<b>NTC</b>	—	5 seconds	100 events/day	2.5 years
<b>Potentiometer</b>	Resistance of potentiometer = 1kΩ	5 seconds	100 events/day	2.5 years

## Summary of Product Codes

Interface	Product code
4–20 mA	DECKSCN-MA0
mV/V	DECKSCN-MV
Voltage (5 V)	DECKSCN-V05
Voltage (12 V)	DECKSCN-V12
Vibrating Wire	DECKSCN-VBW
Pt100–Pt1000	DECKSCN-PT1
NTC	DECKSCN-NTC
Potentiometer	DECKSCN-POT

\*1 Wireless coverage of the device may vary depending on the scenario.

\*2 Guaranteed only with the dust cap or smart cable correctly screwed.

\*3 Battery life may vary considerably depending on the probe. Battery life may shorten when operating in extreme temperatures.

## REVISION HISTORY

Version v2.

Version	Changelog
v1	First revision
V2	Document template update

Note: Specifications are subject to review and change without notice.